



ANTONY

Rear Loader


REFUSE COMPACTOR



MINI COMPACTOR



GA DRAWING OF 7 cum COMPACTOR ON AL10.12

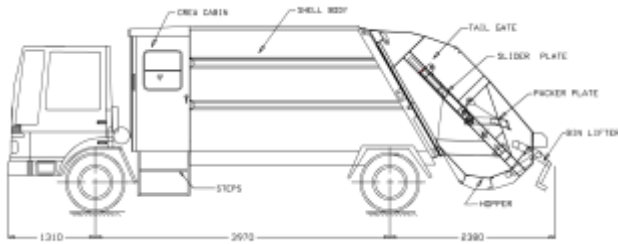

SPECIFICATIONS

CONTENTS	6 CU.M - 8 CU.M	GROUND CLEARANCE	400MM
DRIVE LINE	4 X 2	CHASSIS WEIGHT WITH CABIN	3688KG
WHEEL BASE	3970MM	EQUIPMENT WEIGHT	3892KG
LENGTH	7870MM	G.V.W.	10900KG / 11900KG
WIDTH	2200MM	LOADING BOX VOLUME	6CU.M
HEIGHT	2700MM	HOPPER VOLUME	1CU.M
FRONT OVERHANG	1191MM	BIN LIFTER SYSTEM	UNIVERSAL EN
REAR OVERHANG	2382MM		STANDARD

HYDRAULIC CYLINDERS - 09 NOS.

TAILGATE RAISE (2)		PACKING BLADE (2)		SLIDE (2)		EJECTION(1)		BIN LIFTER (2)	
BORE	STROKE	BORE	STROKE	BORE	STROKE	BORE	STROKE	BORE	STROKE
63MM	405MM	70MM	460MM	80MM	685MM	80MM	1585MM	80MM	250MM

HYDRAULIC SPECIFICATIONS

PUMP TYPE	HIGH PRESSURE
MAX. OPERATING PRESSURE	2500PSI
L.P.M.	60-70LPM

FILTER (REPLACEABLE VALVES)

RETURN-10 MICRON	PACKING CONTROL	SPOOL TYPE
SUCTION-140 MICRON	EJECTOR AND TAILGATE RAISE	SPOOL TYPE

PERFORMANCE SPECIFICATION

Compaction - upto 363kgs/cu.m
 Hopper size - 1 cu.m
 Packing cycle time - 15-17 secs
 Reload time - 5-6 secs

The compactor is fitted with Bin Lifter capable of lifting Bins ranging 120,240,660 & 1100 ltrs.

Accessories shown in the picture or otherwise do not constitute standard fitment

CAUTION

The contents are not binding and are subject to change without notice. There are indicative Specifications for Reference only.

ISO 9001 : 2008

APPROVED BY
IRQS



Antony Motors Pvt. Ltd.

A-390/391, M.I.D.C., T.T.C. Zone, Mahape, Navi Mumbai - 400 710. India

Tel.: +91 22 2778 1800 • Fax: +91 22 27783000 • contact@antonyasia.com • www.antonyasia.com

Disclaimer: All designs specifications and components are subject to change at the manufacturers sole discretion at any time without notice. Data published here is for information purposes only and shall not be constructed to warrant suitability of the unit for any particular purpose, as performance.